

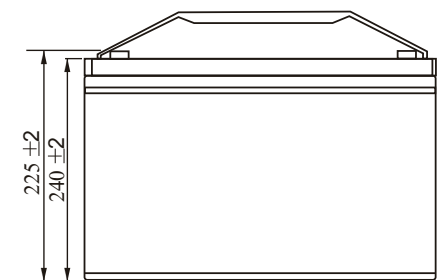


# Lithium 12V -150A/H

## Features of LiFePO4 Battery

- **Longer Cycle Life:** Offers up to 20 times longer cycle life and five times longer float/calendar life than lead acid battery, helping to minimize replacement cost and reduce total cost of ownership.
- **Lighter Weight:** About 40% of the weight of a comparable lead acid battery. A 'drop in' replacement for lead acid batteries.
- **Higher Power:** Delivers twice power of lead acid battery, even high discharge rate, while maintaining high energy capacity.
- **Wider Temperature Range:** -20 °C~60 °C.
- **Superior Safety:** Lithium Iron Phosphate chemistry eliminates the risk of explosion or combustion due to high impact, overcharging or short circuit situation.

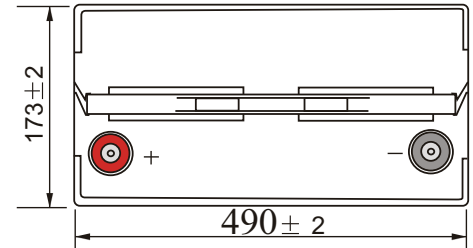

## Specifications


Electrical Characteristics	Nominal Voltage	12.8V
	Nominal Capacity	150Ah
	Energy	1920Wh
	Internal Resistance	≤60mΩ
	Cycle Life	>2000 cycles @1C 100%DOD
	Months Self Discharge	<3%
	Efficiency of Charge	97% @0.5C
	Efficiency of Discharge	96~99% @1C
Standard Charge	Charge Voltage	14.6 ± 0.2V
	Charge Mode	0.5C to 14.6V, then 14.6V, charge current to 0.02C(CC/CV)
	Charger Current	50A
	Max. Charge Current	150A
	Charge Cut-off Voltage	15.6 ± 0.2V
Standard Discharge	Continuous Current	50A
	Max. Pulse Current	200A(<1S)
	Discharge Cut-off Voltage	10V
Environmental	Charge Temperature	0 °C to 45 °C (32F to 113F) @60 ± 25% Relative Humidity
	Discharge Temperature	-20 °C to 60 °C (-4F to 140F) @60 ± 25% Relative Humidity
	Storage Temperature	0 °C to 40 °C (32F to 104F) @60 ± 25% Relative Humidity
	Water Dust Resistance	IP56
Mechanical	Cell & Method	Square 4S3P
	Plastic Case Weight (lbs./kg.)	ABS 17.40kg(14.548lbs)
	Terminal	M8

# LI-12-150




## Different Rate Discharge Curve

Different Rate Discharge Curve @25°C

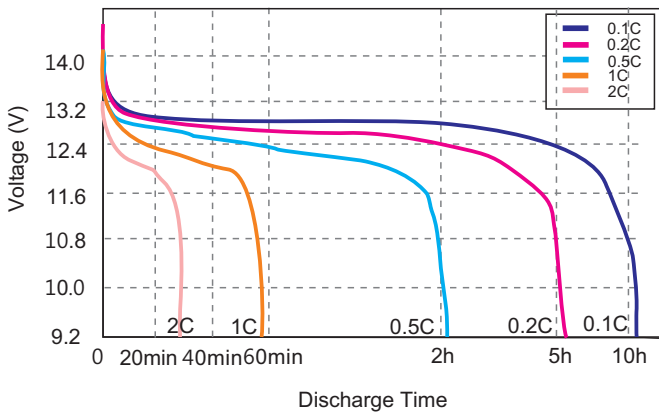


## Different Temperature Discharge Curve

Different Temperature Discharge Curve @0.5C

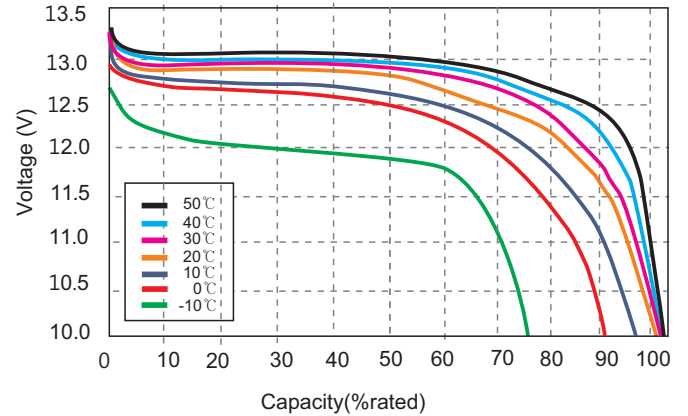


## State of Charge Curve

State of Charge Curve @0.5C 25°C

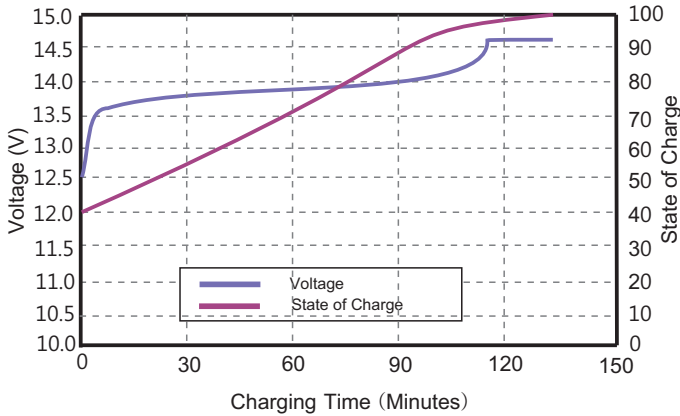


## Charging Characteristics

Charging Characteristics @0.5C 25°C

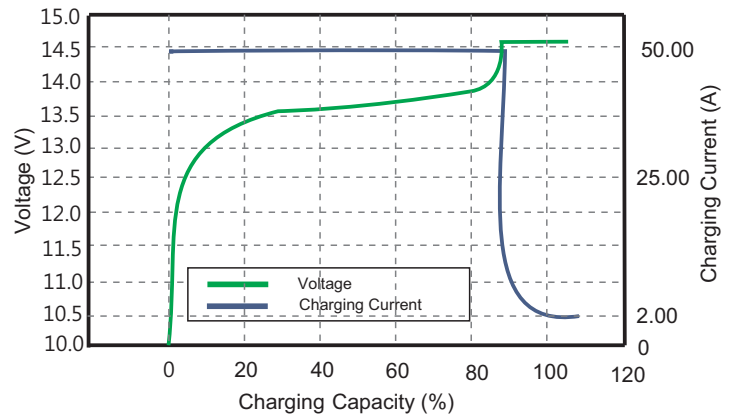


## Cycle Life Curve

Different DOD Discharge Cycle Life Curve @1C

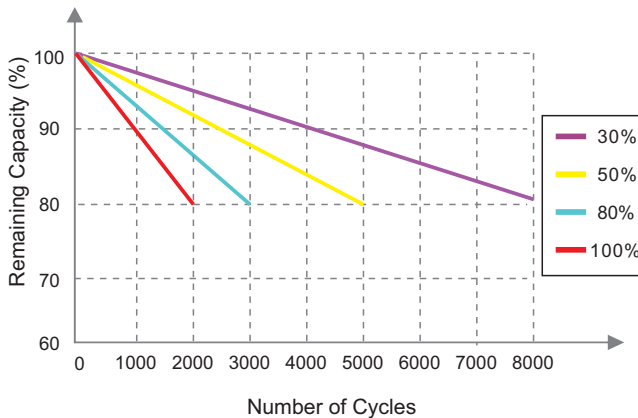

## Self Discharge Characteristics Curve

Different Temperature Self Discharge Curve

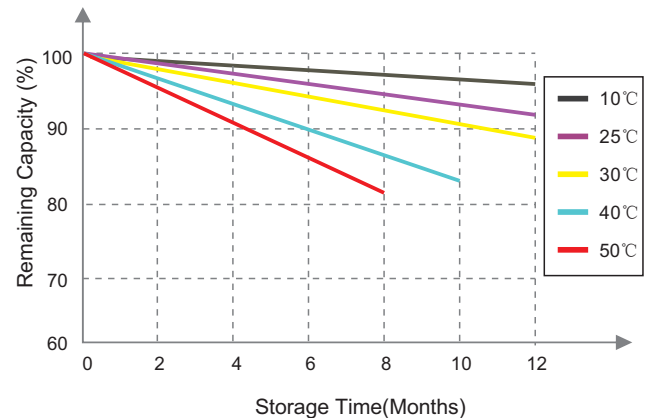

Specifications and graphs are indicative and subject to change due to variances in manufacturing

43 Canada Cres, Hornby South, Christchurch Ph 03 344 5418 [www.digitalrv.co.nz](http://www.digitalrv.co.nz)



**DIGITAL RV**  
digital products & services for the mobile market